

## Mini SISO Indoor/Outdoor Directional Panel Antenna [617-960, 1695-2690 & 3300-4200 MHz]

# GI1001-B5490

## **Description:**

- Directional SISO antenna for indoor/outdoor DAS applications
- Verically polarized design covering 600 MHz/LTE700/CELL850, AWS/ DCS/PCS/WCS/BRS and Wideband 3.5 GHz frequencies
- Bottom access 4.3/10 (F) pigtail for wall or pole mounting
- Includes wall/pole mounting bracket, optional 2-axis swivel bracket




617-960 MHz, 1695-2690 MHz & 3300-4200 MHz 1-Port Mini-Panel Directional Antenna

| Electrical Specifications   |                                                          |            |             |                          |           |            |           |           |           |
|-----------------------------|----------------------------------------------------------|------------|-------------|--------------------------|-----------|------------|-----------|-----------|-----------|
| Frequency Band [MHz]        | 617-698                                                  | 698-896    | 896-960     | 1695-2200                | 2305-2360 | 2496-2690  | 3300-3550 | 3550-3700 | 3700-4200 |
| Input Connector Type        | 1x 4.3-10 DIN(F) w/ pigtails (12", 30cm) - Bottom Access |            |             |                          |           |            |           |           |           |
| VSWR (max.) / RL (dB, min.) | 1.67:1/12.0                                              | 1.5:1/14.0 | 1.67:1/12.0 | 0 1.5:1/14.0 1.67:1/12.0 |           | 1.5:1/14.0 |           |           |           |
| Polarization                | Vertical                                                 |            |             |                          |           |            |           |           |           |
| Horizontal Beamwidth (°)    | 99                                                       | 88         | 83          | 95                       | 109       | 70         | 90        | 112       | 93        |
| Vertical Beamwidth (°)      | 84                                                       | 66         | 51          | 71                       | 54        | 56         | 47        | 43        | 52        |
| Gain (dBi, max.)            | 6.4                                                      | 7.5        | 8.3         | 5.7                      | 6.6       | 6.2        | 6.6       | 6.8       | 8.1       |
| Gain (dBi, avg.)            | 5.3                                                      | 6.8        | 7.9         | 5.2                      | 6.2       | 5.8        | 6.0       | 6.5       | 7.1       |
| Front-to-Back Ratio (dB)    | 17 20                                                    |            |             |                          |           |            |           |           |           |
| Downtilt                    | 0° FET                                                   |            |             |                          |           |            |           |           |           |
| Max Power (Watts)           | 50                                                       |            |             |                          |           |            |           |           |           |
| PIM @ 2x43 dBm (dBc, max.)  | -153 -145                                                |            |             |                          |           |            |           |           |           |
| Impedance                   | 50 Ω                                                     |            |             |                          |           |            |           |           |           |

| Mechanical Specifications |                                                |
|---------------------------|------------------------------------------------|
| Operating Temperature     | -40° to 158°F (-40° to +70°C)                  |
| Antenna Weight            | 2.0 lbs (0.91 kg)                              |
| Antenna Dimension (HxWxD) | 10.2" (259 mm) x 8.0" (203 mm) x 3.9" (100 mm) |
| Radome Material & Color   | ASA, UL94-V0 Compliant (White)                 |
| Pigtail                   | Plenum Rated                                   |
| Flammability              | UL94 V-0 Compliant                             |
| RoHS                      | Compliant                                      |
| Ingress Protection        | Indoor/Outdoor (IP65)                          |




#### **3D Antenna Patterns**

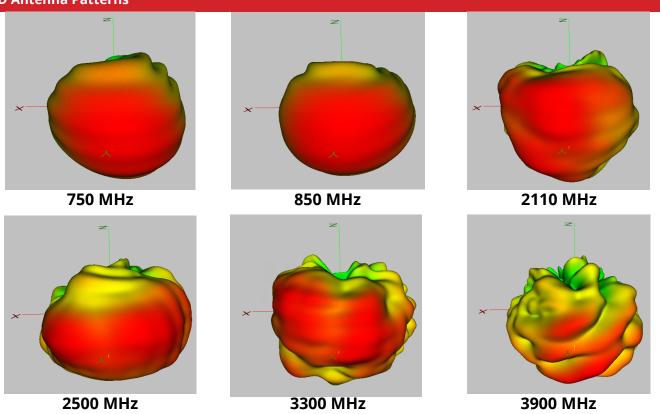

## 3D Pattern Notes:

3D images above denote Z-axis (green) pointed towards ceiling and Y-axis pointing towards front of antenna, which corresponds to 0° in pattern

## **Antenna Outline**

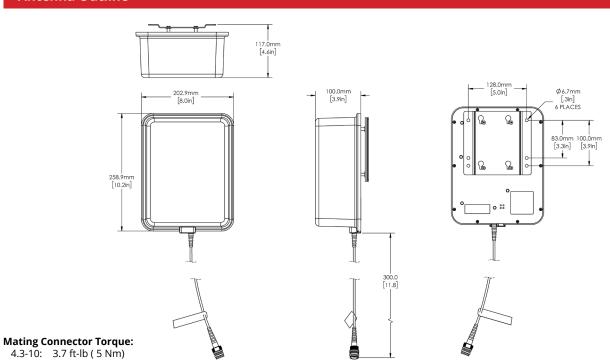

RFD#: B5490; Revision: R2; Release Date: April 25, 2022;

Copyright © 2022 – Galtronics Corporation Ltd.



| Part Numbers, Ordering Options                                        |  |                                   |                  |  |  |  |
|-----------------------------------------------------------------------|--|-----------------------------------|------------------|--|--|--|
| Description                                                           |  | Mounting Kit                      | Part Number      |  |  |  |
| Indoor/Outdoor Directional SISO Panel Antenna w/1x 4.3/10 (F) Pigtail |  | Includes Wall/Pole Mounting Plate | GI1001-B5490-112 |  |  |  |

| Mounting Bracket(s):                                                                                                                                                                                                                                                                      |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Mounting Plate Installation [Standard, Included with Antenna]  After affixing the mounting plate to the wall, then mount the antenna on to the mounting plate by sliding it into the slots and securing it with the provided fasteners.                                                   |          |
| Swivel Mounting Bracket (Optional)  Galtronics swivel mounting bracket offers an easy installation solution to mount Galtronics' PEAR panel antennas to either a pole or a wall. The mounting bracket allows a tilt of up to +/-45deg in the horizontal as well as in the vertical plane. | 62-29-03 |